


Photo



Drawing

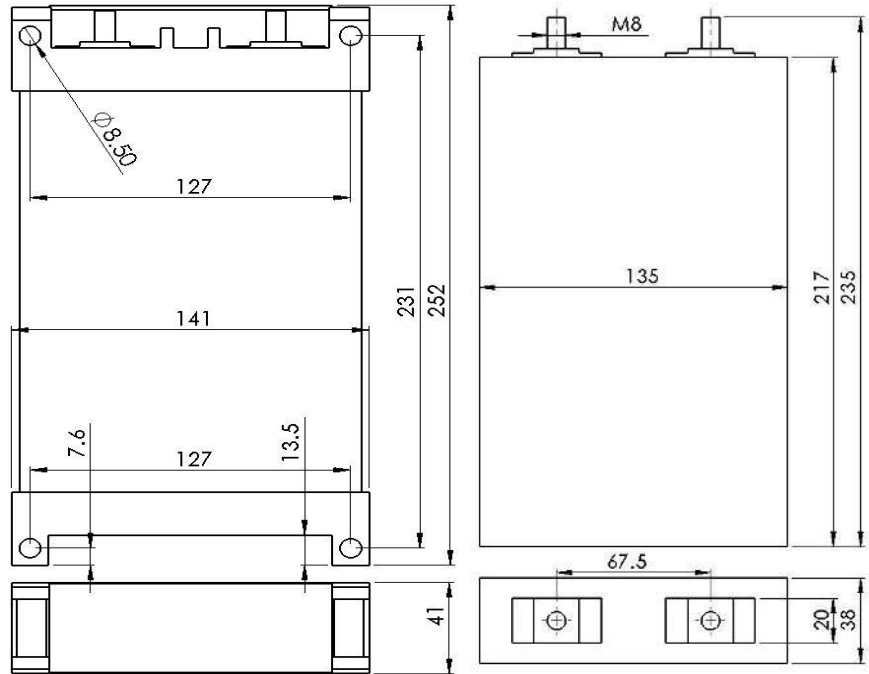

Nominal Capacity		120Ah@0.3C Discharging
Minimum Capacity		120Ah@0.3C Discharging
Nominal Voltage		3.7V
Internal Resistance		$\leq 0.8m\Omega$
Charging(CC-CV)	Charging Current	0.5C continuous / 3C peak
	Charging Upper Limit Voltage	4.2V
Discharging	Discharging Current	2C continuous / 5C peak
	Discharging Cut-off Voltage	3.0V
Charging Time	Standard Charging	2H
	Quick-acting Charging	1H
Operation Temperature	Charging	0°C~45°C
	Discharging	-20°C~55°C
Weight		2.55Kg
Size / with Plastic Holders		38x135x235mm/ 41x141x252mm
Shell Material		Stainless Steel 304

