


5000W

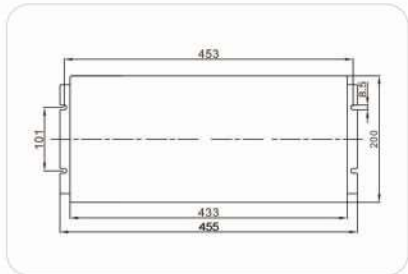

机器型号	Model	B12P5K-1	B24P5K-1	B48P5K-1	B12P5K-2	B24P5K-2	B48P5K-2
输出功率	Continuous Power	5000W					
峰值功率	Surge Power	10000W					
输出频率	Frequency	50HZ±0.5HZ or 60HZ±0.5HZ					
输出波形	Wave Form	纯正弦波 Pure Sine Wave					
波形失真	AC Regulation	THD<3% (线性负载Linear load)					
USB	USB Outlet	5V 500MA					
输出效率最高	Output Efficiency	最大 Highest94%					
输入电压	DC Voltage	DC12V	DC24V	DC48V	DC12V	DC24V	DC48V
输出电压	AC Voltage	100VAC or 110VAC or 120VAC±5%			220VAC or 230VAC or 240VAC±5%		
空载电流 小于	No Load Current Draw	3.2A	1.6A	0.8A	3.2A	1.6A	0.8A
输入电压范围	DC Voltage Range	10-15.5V	20-31V	40-61V	10-15.5V	20-31V	40-61V
欠压报警	Low Voltage Alarm	10.5±0.5V	21±0.5V	42±1V	10.5±0.5V	21±0.5V	42±1V
欠压保护	Low Voltage Shut Down	10±0.5V	20±0.5V	40±1V	10±0.5V	20±0.5V	40±1V
过压保护	Over Voltage Shut Down	15.5±0.5V	31±0.5V	61±1V	15.5±0.5V	31±0.5V	61±1V
欠压恢复	Low Voltage Recovery	13±0.5V	24±0.5V	48±1V	13±0.5V	24±0.5V	48±1V
过压恢复	Over Voltage Recovery	14.8±0.5V	29.5±0.5V	59±1V	14.8±0.5V	29.5±0.5V	59±1V
保护功能	Protection	欠压/过压 Low Voltage/Over Voltage		LED红灯亮, 关闭并报警 LED Red Light, turn off and alarm			
		过载 Overload		LED红灯亮, 关闭锁死并报警 LED Red Light, turn off, lock up and alarm			
		过温 Over Temp		LED红灯亮, 关闭并报警 LED Red Light, turn off and alarm			
		短路 Short Circuit		LED红灯亮, 关闭并报警 LED Red Light, turn off and alarm			
	输入反接 Input Oppose	二极管或者MOS管 Diode or Mos FET					
工作环境温度	Working Temperature	-10° -+50°					
储存环境温度	Storage Temperature	-30° -+70°					
产品尺寸	Production Size (mm)	455×200×145					
包装尺寸	Package Size(mm)	582×300×235					
净重/毛重	N.W/G.W(Kg)	10.6/12.6					
数量/箱	Qty/Ctn	1台PCS					
外箱尺寸	Carton Size(mm)	582×300×235					
整箱重量	Carton Weight(Kg)	28					
质保	Warranty	2年Years					
配置	Configuration	标配Standard					
启动	Start	双极软启动Bipolar soft-start					
冷却方式	Cooling way	智能风冷 Intelligent Cooling Fan					